


PLB-21

Universal Platform for Interfacing with PicoLAS-Products

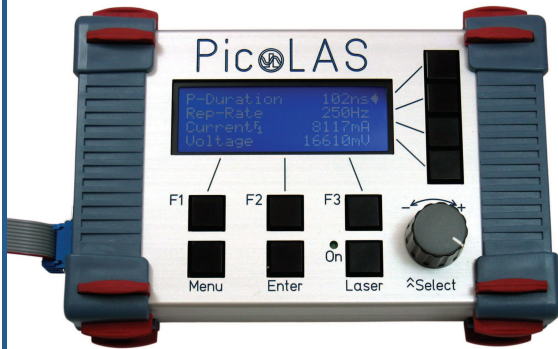

- Allows full control of all relevant device parameters
- Interfaces with many available PicoLAS-controllers
- No external power supply required
- Robust aluminum housing

Product Description:

The external operating unit PLB-21 provides an easy-to-use interface for the PicoLAS driver modules.

This operating unit displays all essential information about the current status of the connected PicoLAS device on a LC-Display. All pulse parameters can be controlled via short, self-explanatory menu pages.

The operating unit draws its energy directly from the connected PicoLAS device, thus, it keeps the workbench free from extra cables.

Technical Data:*

Communication protocol	RS-232
Display	4 rows @ 20 characters each line
Supply voltage	no additional external power required (Phantom supply by power stage)
Dimensions in mm	172 x 115 x 43
Weight	700g
Operating temperature	0 to +45 °C

* Technical data is subject to change without further notice.

Compatible Products: *PLCS-21*
LDP-C 80-20
LDP-CW 80-20
LDP-C 120-20
LDP-CW 120-20
LDP-C 200-20
LDP-QCW 300-12

