

LDP-CW 20-50

Fully digital cw-driver for High Power Laser Diodes

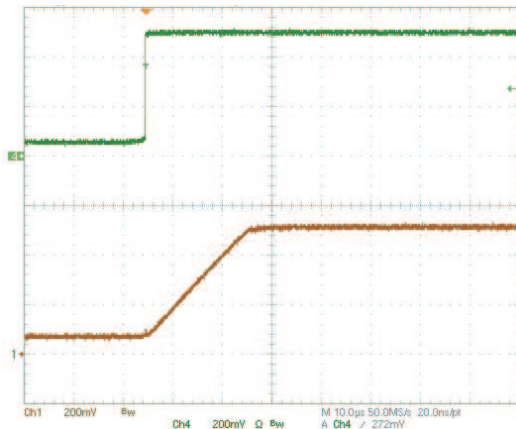
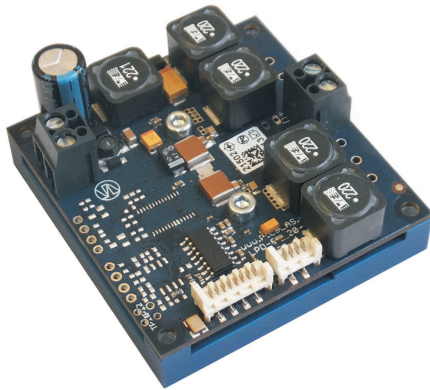


Figure: Soft Start, Current monitor output, scale: 10A/Div

Product Description:

The LDP-CW 20-50 OEM is a very affordable, compact and efficient current supply for an output power up to 1kW.

The capability ranges from continuous output current to analog modulated waveforms like sinusoidal, rectangular or triangular. The modulation is limited usually by the load inductance.

Intended field of application are laser soldering and welding as well as generic surface treatment and show lasers.

The innovative current regulation concept of the LDP-CW 20-50 produces, compared to the commonly used linear regulation concept, considerably less losses. Hence only one supply voltage is needed for the control logic and the power stage. The current consumption drawn from the power supply only needs to cover the average laser power and is typically much less than 20 A.

- Output current: 1 ... 20 A
- Compliance voltage: 0 ... 50 V
- Output power: 1kW
- Coverage of cw range
- Analog modulation
- Half-Brick size (35 cm²)
- Several protective features
- High efficiency

Technical Data:*

Output current	1 ... 20 A
Max. compliance voltage	1 ... 50 V
Current ripple	< 1%
Ripple frequency	> 1 MHz
Current overshoot	refer to manual**
Analog modulation (10 A _{pp})	refer to manual**
Current settling time (full-scale)	Refer to manual**
Current setting input	Analog or digital
Supply voltage	12 ... 55 V DC (min. 5 V above laser diode voltage)
Max. power dissipation	< 45 W
Dimensions in mm	60.9 x 57.8 x 29
	Half-Brick size
Weight	194 g
Operating temperature	0 to + 55 ° C

* Specifications measured with a fast recovery diode instead of a laser diode. Technical data is subject to change without further notice.

** actual values depends on hardware setup

Designed to shield your laser diode from damage, the LDP-CW 20-50 features a number of powerful protective safeguards:

- Innovative current regulation concept actively prevents laser diode from overshoots and over-current
- Integrated Soft Start
- Over-temperature shutdown
- Enable/Disable input
- Driver status output
- Protection of the laser diode against reverse currents

Optional Accessories: LDP-C-BOB
PLB-21