


## LDP-VRM-01-12 CA


### Laser Diode Driver

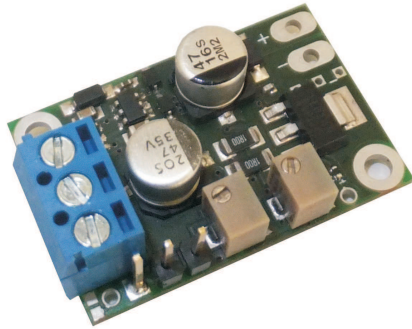

- Analog modulation dc .. 200 kHz
- Output current: 0 ... 1 A
- High speed
- Adaptive DC/DC converter

### Technical Data:\*

Output current	0 ... 1 A
Max. compliance voltage	Single laser diode, up to 12V
Current noise	< 3%
Current overshoot	< 5%
Analog modulation	290 kHz typical 200 kHz guaranteed
Current settling time (full-scale)	
Current setting input	0 ... 5 V
Current monitor	0.5 V/A
Trigger	Analog / TTL (jumper)
Supply voltage	12 ... 20 V min 3 V above compliance
Power dissipation	2.2 W
Dimensions in mm	30 x 20 x 10
Weight	6 g
Operating temperature	0 to + 55 ° C

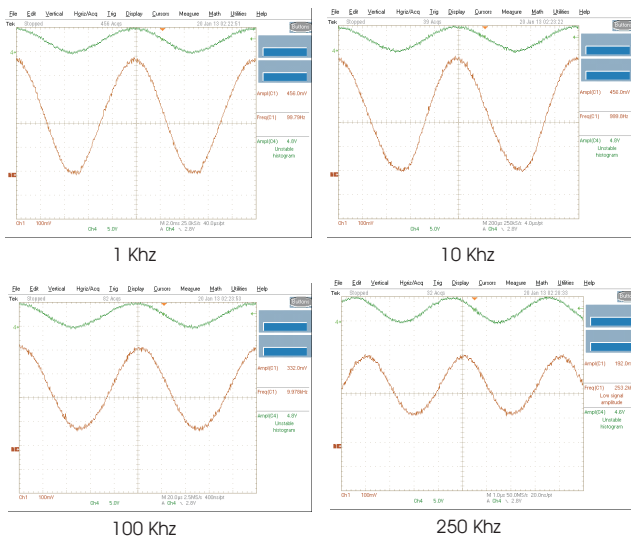

\* Specifications measured with a fast recovery diode instead of a laser diode. Technical data is preliminary and subject to change without further notice.

### Product Description:

The LDP-VRM-01-12 C A is a fast driver for typical Laserdiodes. With its high output voltage it is suitable for IR, blue Ld's and all kinds of LED's.

The internal DC/SC converter stabilizes the voltage drop across the driving MOSFET to prevent excessive losses.

- Innovative current regulation concept actively prevents laser diode from overshoots and over-current
- Protection against transients through regulated current rise time
- Adaptive DC&DC converter for lowest losses

Optional Accessories: None

