


## LDP-C 80-20

### Driver for High Power Laser Diodes



- Output current: 2 .. 80 A
- Compliance voltage: 1 .. 20 V
- Minimum pulse width: 4  $\mu$ s
- Optional housing available
- Stackprotector® and other protective features
- High efficiency

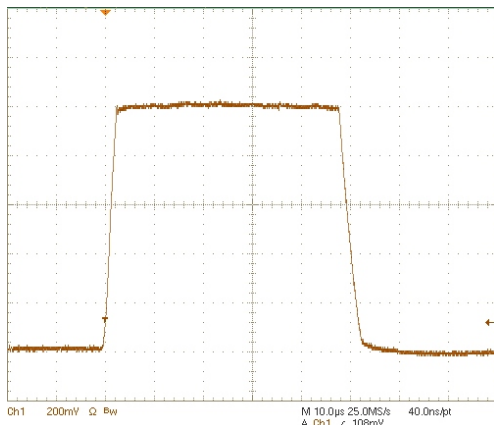

Current monitor output, scale: 20A/Div

### Technical Data:\*

Output current	2 .. 80 A
Max. compliance voltage	20 V
Max. output power	1600 W
Min. pulse width	< 4 $\mu$ s **
Max. pulse width	cw
Rise time	1 .. 5 $\mu$ s **
Max. rep.-rate	> 80 kHz **
Current ripple	< 1 A
Current overshoot	< 5 %
Current settling time	< 1 ms
Current setting input	0 .. 2.0 V external (50 A/V)
Current monitor	50 A/V **
Voltage monitor	0.1 V/V **
Connectivity	LDP-C BOB PLB-21 USB 2.0
Supply voltage	12 .. 26 V DC (at least 4 V above compl. voltage)
Dimensions in mm	100 x 180 x 69
Weight	1535 g
Operating temperature	0 to +55 °C

\* Specifications measured with a fast recovery diode instead of a laser diode. Technical data is subject to change without further notice.

\*\* See manual for details

### Product Description:

The LDP-C 80-20 is a compact and efficient current supply to drive laser diodes. The operating range includes continuous current as well as pulsing the diode. The innovative current regulation concept of the LDP-C 80-20 produces, compared to the commonly used linear regulation concept, considerably less losses. Hence, only one supply voltage is needed for the control logic and the power stage. The LDP-C 80-20 is suitable for a very wide range of applications. Especially several redundant protective features as well as a built-in self-test enable the use for medical applications.

- Stackprotector® cuts the power stage from the supply
- Innovative current regulation concept actively prevents laser diode from overshoots and overcurrent
- A crowbar shorts the output in case of an error
- Integrated Soft Start
- Protection against transients through regulated current rise time
- Overtemperature shutdown
- Enable/Disable input
- Pulser status output
- Protection of the laser diode against reverse currents

### Optional Accessories: LDP-C BOB PLB-21

